

The ever-evolving latest CFD solution

Discover what you want from your CFD tool here


scFLOW sc/Tetra

SC/Tetra has been characterized by sophisticated mesh generation function, high speed computing capability, and user-friendly features throughout the operation. As its advanced version, scFLOW has been released. It is equipped with more stable Solver that achieves calculation speed three times faster (at maximum) than before, and new Preprocessor that helps entry-level users build complicated models and high-quality mesh. scFLOW, the new generation software, keeps on evolving.

Simplification of Preprocessor operations

FLOW


From the CAD data to analysis mesh data, the required operations are grossly simplified compared to before. The conservation of assembly information and the settings of conditions on the parts bring the sense of continuity from the CAD operations and reduce the operational burden of the users.

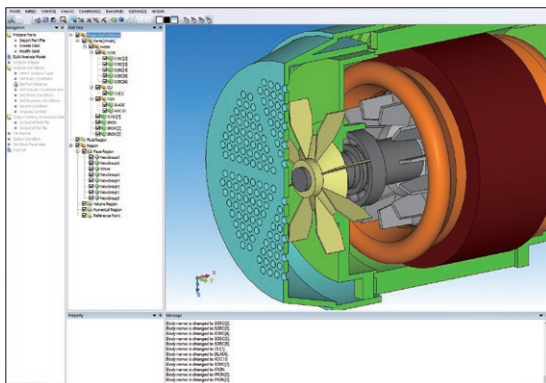

Polyhedral mesher

FLOW


Using polyhedral mesh elements improves stability and calculation accuracy of cell-centered solver. In scFLOWpre, mesh can be generated according to the target number of mesh elements and automatically refined near wall area. The automatic mesher function also enables users to specify mesh refinement level of each part and region.

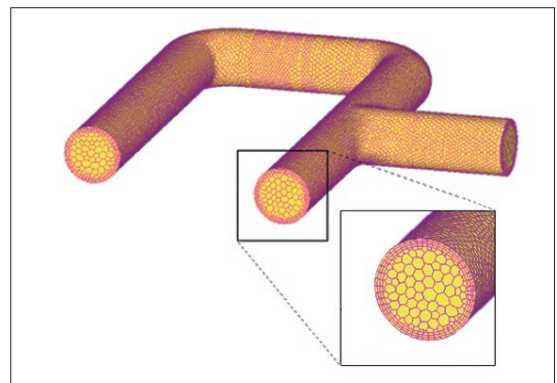

Modifying CAD data

FLOW SCT

When CAD data to be used for simulation has a problem, the data can be modified with Preprocessor. Boundary conditions can be set based on the part names and color information set in the CAD data. When some regions are missing in the model, shapes such as cuboids and cylinders can be added.

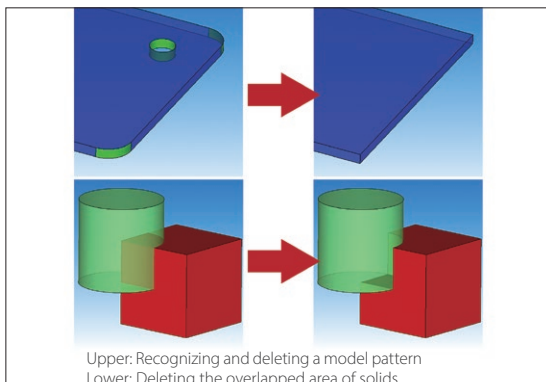


Upper: Recognizing and deleting a model pattern
Lower: Deleting the overlapped area of solids

Viewer mode

FLOW


Preprocessor data can be displayed in the viewer mode without the Pre-/Post-processor license, when the license is taken by the mesher or by Postprocessor and is unavailable.

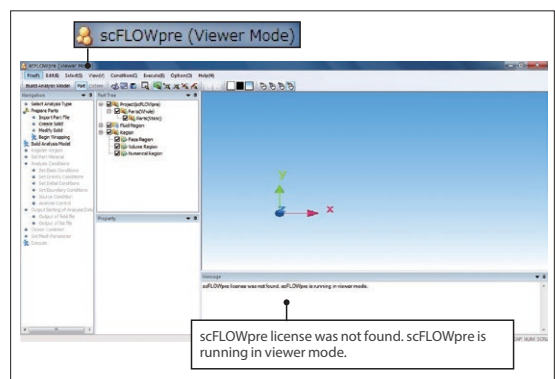

Mesh-adaptation analysis

FLOW SCT


With this function, mesh will be automatically refined where a flow or pressure changes greatly in a steady-state analysis. After the calculation in Solver is completed, Preprocessor automatically launches and executes gridding and meshing based on the calculation result. By specifying the target number of elements, coarse mesh is generated first and the mesh is automatically refined to be appropriate for the calculation. The function is useful for an analysis of flows in a tube with a complicated shape.

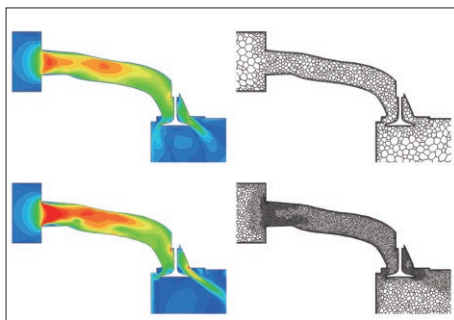

Discontinuous mesh

FLOW SCT


Flow with object motion can be calculated, including rotation of fans and turbines, and crossing travel of automobiles or trains (translation). The function enables an analysis with consideration on shear heating between rotor and pad in a disk brake. The function also makes it possible to analyze a combination of rotation and translation such as a piston pump.

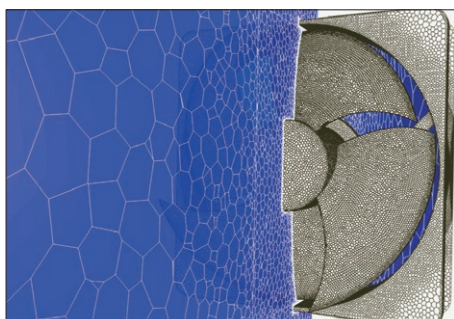

Free surface (steady-state / transient)

FLOW SCT

The shape of an interface between a gas and a liquid can be simulated. Calculations by VOF method (new method: FIRM) are fast and accurate, and functions including moving boundary, overset mesh, and particle tracking can be used in combination. Because a phenomenon where the phase interface becomes stable can be analyzed in a steady-state calculation, the result can be obtained in a shorter time than before.

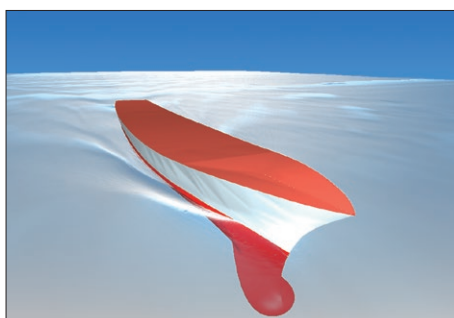


* Only scFLOW supports FIRM. FIRM cannot be used for overset mesh or steady-state analyses.

Stabilization of calculation

FLOW


Even for mesh data with elements of extremely low quality, the calculation can be stabilized by the automatic processing to avoid divergence. This function helps Solver be more robust.

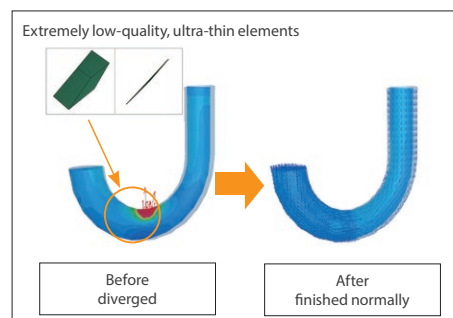

Overset mesh

FLOW SCT


Free movement of regions, that cannot be analyzed using existing functions such as stretching or rotating elements, can now be simulated by overlapping mesh elements for stationary and moving regions. This function supports an overlap of multiple moving regions, a contact between objects, and a 6-degree-of-freedom motion of rigid bodies. This is useful to analyze opening and closing of a valve of an engine port or a gear pump where gears engage with each other.

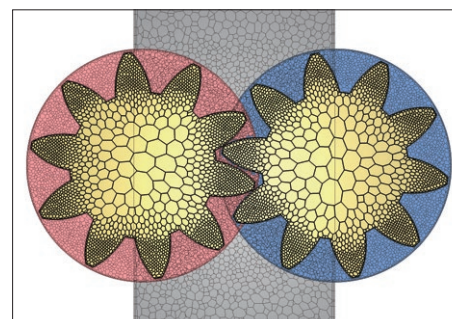

6-degree-of-freedom motion (6DOF)

FLOW SCT


Passive translation and rotation of a rigid body receiving a fluid force can be analyzed. With the function, the user can analyze a ball valve with consideration of the elasticity of the spring (1D translation), and paper airplane with consideration of 6-degree-of-freedom rigid-body motion (3D translation + 3D rotation). In addition, the function is applied to analyses of check valves, wind power generators, and blades of wave power generators.

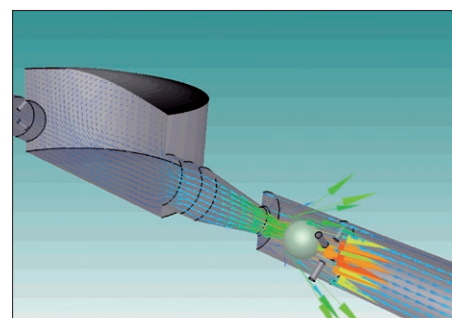

Cavitation

FLOW SCT


This function enables simulation of a vaporization phenomenon called cavitation, which is caused at an area where pressure of a liquid becomes lower than in the surrounding area, such as with a propeller rotating at a high speed under water. The occurrence of cavitation can be predicted by applying the cavitation model based on the pressure values. The software also supports problems caused by cavitation such as erosion.

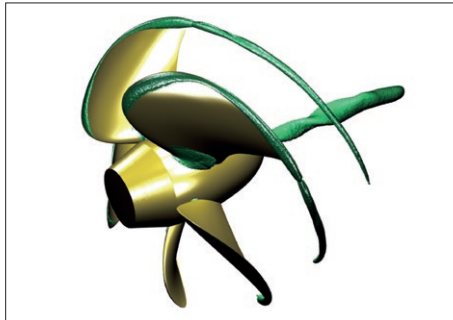

Compressible fluid

FLOW SCT


The software can analyze phenomena such as supersonic flow and significant expansion/contraction of volume. For a compressible fluid, both the pressure-based and the density-based Solvers can be used. The density-based Solver keeps the calculation stable even with high Mach number. You can select either Solver depending on the analysis target and phenomenon.

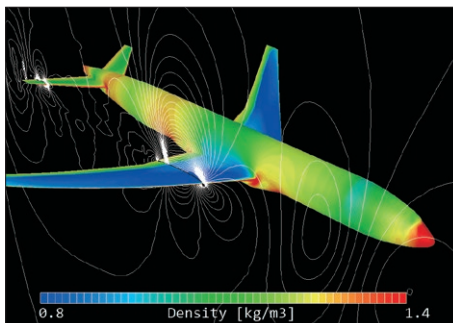

Evaporation/Condensation

FLOW


Free surface analysis function (VOF method) of this software can simulate phase change between gas and liquid, such as evaporation and condensation. By considering phase change, not only simple heat conduction but also heat transfer from latent heat can be calculated. For example, this method can be applied to internal flow simulations for heat transfer devices such as heat pipes, in which a refrigerant liquid changes to vapor by absorbing heat from an outer region.

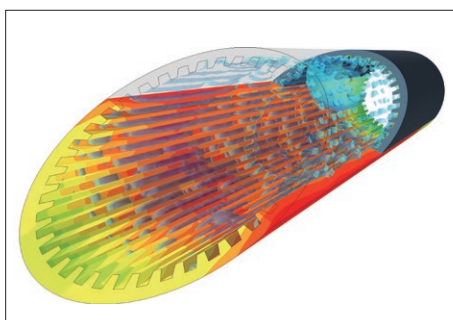

Fluid-structure interaction

FLOW SCT


This option is used for two-way FSI (fluid-structure interaction) with structural analysis software. With this option, not only rigid bodies but also elastic bodies can be treated. Deformation of an object caused by a fluid force and the change of fluid caused by the deformation can be analyzed.

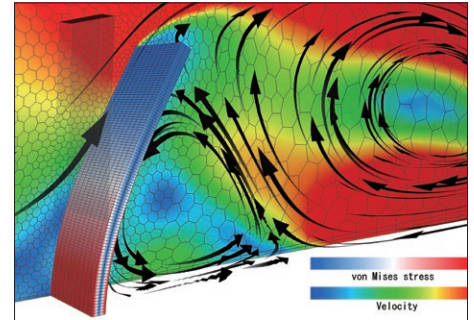

Aerodynamic noise analysis

FLOW SCT


Sound caused by pressure oscillation of a fluid, such as wind noise, and sound caused by resonance can be predicted. The calculation can be performed accurately by using LES and the weak compressible flow model. The frequency of aerodynamic noise can also be analyzed using the Fast Fourier Transform (FFT) method from the CFD analysis result.

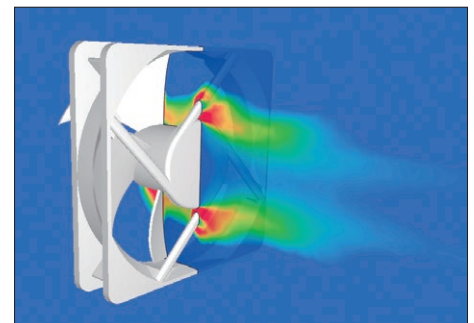

Dispersed multi-phase flow

FLOW SCT


This function can simulate flows containing many bubbles, droplets, or particles (dispersed phase), which are difficult to be analyzed using free surface. This function is a multi-fluid model that can predict volume fraction distribution and velocity distribution of each phase by solving the governing equation under the assumption that the dispersed phase is a fluid (continuous phase). The function is useful to analyze the bubble jet effect and aeration tanks.

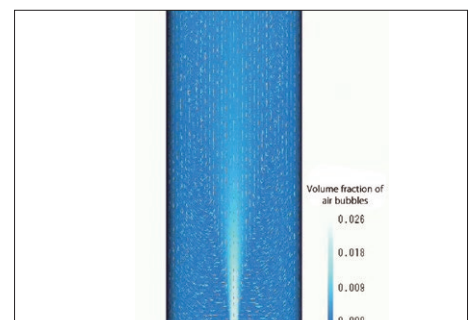

Particle tracking

FLOW SCT

Particle tracking function enables analyzing behavior of particles in flow. When analyzing small particles that follow the fluids movement (such as steam and dust), marker particle function can be used to evaluate particles in flow that change over time, which assumes that particle movement is in accordance with fluid velocity.

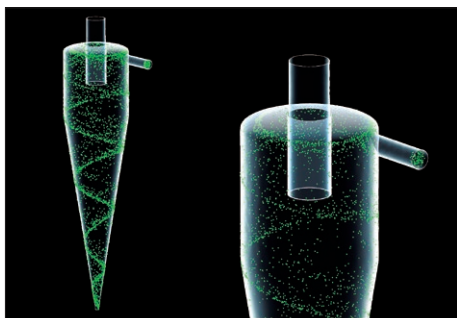


Liquid film model

FLOW SCT

The liquid film model is an extended function of the particle tracking function. By using the model, you the user can simulate the phenomenon that liquid particles change to a liquid film (water on a wall) when they reaching on the a wall. A liquid film on a wall flows with the influence of gravity and a gas-phase flowdown depending on an angle of the wall and collects in at a certain position.

The analysis results are output as the thickness of a liquid film.

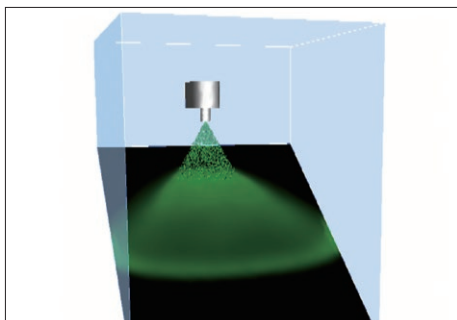

LES

FLOW SCT


LES is one of the turbulent flow models. It models eddies smaller than the mesh element in size and directly calculates other eddies. Although calculation load is large, LES enables simulations closer to real phenomena. LES is often used in noise analyses, significantly affected by time variation, to simulate the behavior of small eddies. The user can use the hybrid model with RANS, a turbulent model of small calculation load.



Humidity dew condensation

FLOW SCT


The amount of dew condensation on an object surface can be calculated from the surface temperature and water vapor in the air. You can output the amount of dew condensation per unit time in a steady-state analysis and the accumulated dew condensation in a transient analysis. Evaporation from a surface where dew condensation occurs can be calculated simultaneously, and this is useful for an analysis of a windshield defroster.

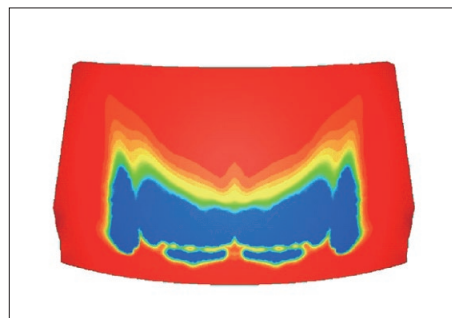

Thermoregulation-model (JOS)

FLOW SCT

Combination use of the thermoregulation-model (JOS) and a fluid analysis enables analyses of the surface temperature of a human body under a certain thermal environment. It can also be used to analyze temperature and humidity changes in the surrounding environment of a human body. The user can consider age, clothes, and physiological phenomena of the human body such as heat transfer by blood flow in addition to the surrounding environment of a human body such as temperature and velocity.

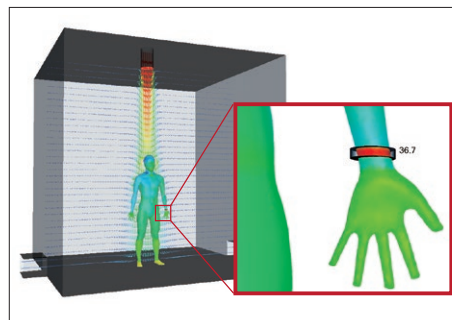


*JOS and JOS-2 developed by Tanabe laboratory at Waseda University, et al. are introduced for the thermoregulation model.

Radiation

FLOW SCT


Heat transfer by infrared-ray radiation can be considered by setting emissivity and temperature difference between objects. The user can choose VF (view factor) method or FLUX method as a calculation method. The user can also consider wavelength dependence, transmission, absorption, refraction, diffusion, and reflection of radiation. In FLUX method, the user can also consider directionality.

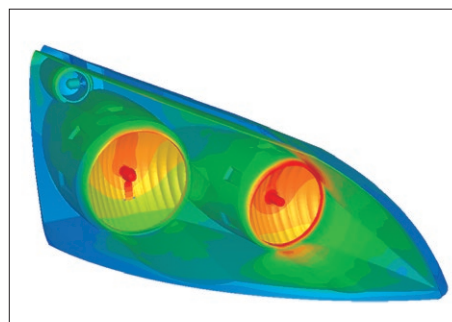

Mapping

FLOW SCT


When a target phenomenon is in a small range and the phenomenon is affected by a wide range of its surrounding area, analysis results of the surrounding area can be used for an analysis of the target phenomenon as boundary conditions to decrease the calculation load.

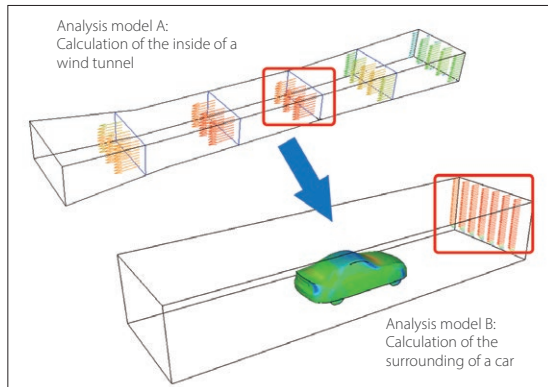

Fan model (rotating blades)

FLOW SCT


With this model, an average flow field around rotating blades can be simulated only by entering characteristic properties regardless of real shapes of fans or propellers. The user can use the non-dimensional swirl coefficient model, the simplified propeller model, and the simplified rotor model. This model is useful to analyze axial-flow windmills and waterwheels.

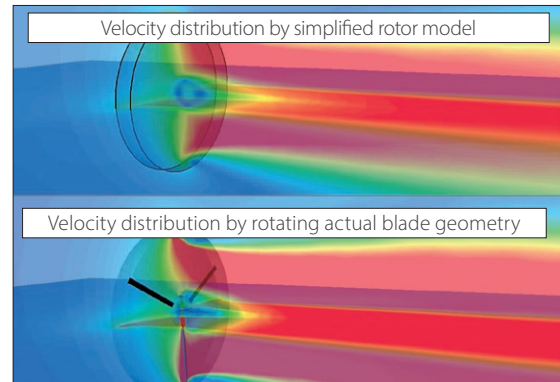

Operation logging by VB interface

FLOW


The operations in Preprocessor can be saved as a log file using the VB interface. Making the user scripting unnecessary, this makes the construction of an automated system affordable in a short period of time based on the files storing the operation logs.

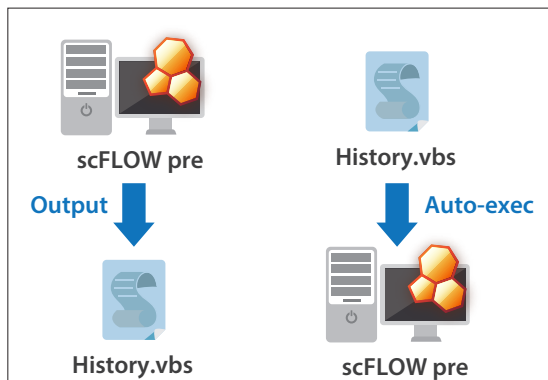

Coupled analysis with GT-SUITE

FLOW SCT

Coupled analysis with GT-SUITE is available. The entire flow in an intake and exhaust system is calculated with GT-SUITE and small flows of each part are interpolated with scFLOW or SC/Tetra. This will enhance calculation accuracy of the whole system.

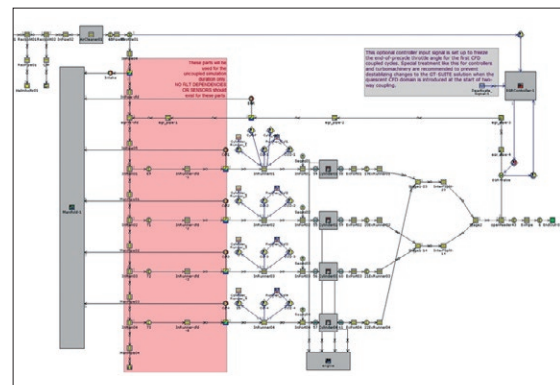


*GT-SUITE is engine intake & exhaust system one-dimensional thermo-fluid analysis software provided by Gamma Technology

Script functions

FLOW


Before, complicated settings, including time-/coordinate-dependent material properties or boundary conditions, required a coding and compilation of user-defined function in C language. With the script functions, compilation is not required. Functions can be written in Preprocessor based on JavaScript.

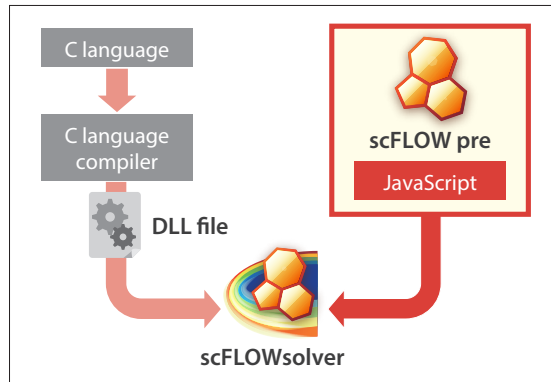

SmartBlades

FLOW


This function is useful for analyzing the shape of a fan automatically throughout creating the shape of a fan (CAD data), calculating the flow, and post-processing. The shape of a fan can be created easily by specifying parameters including the number of blades, fan diameter, rake angle, and skew angle.

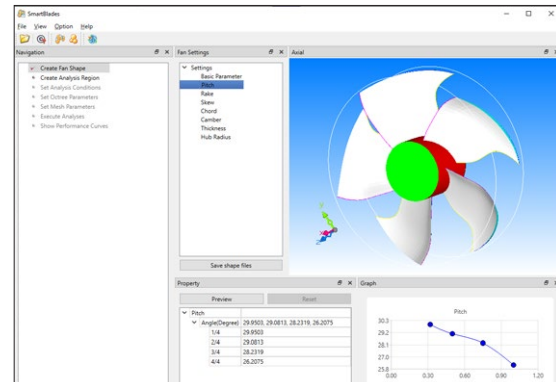

Functions for turbomachinery

SCT


One-pitch shape can be extracted from a periodic model such as an impeller or a vane of turbomachinery. The analysis result of the one-pitch model can be checked in the meridian plane. Two regions whose pitches are different can also be analyzed. The calculation load will be reduced by using this function.

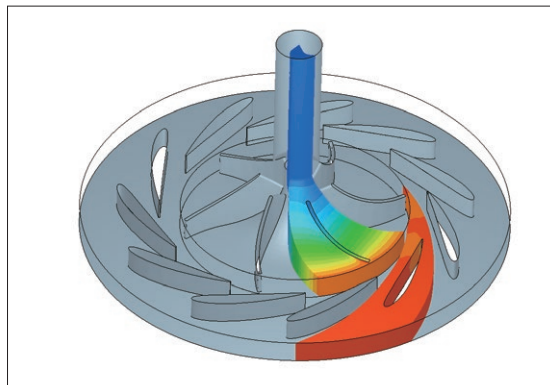

FluidBearingDesigner

SCT

The function creates groove patterns of fluid bearings (dynamic-pressure bearing) and generates mesh. You can select the shape of grooves such as journal and thrust and materials such as porous material. From calculation results, you can obtain parameters for designing fluid bearings such as axial force and drag coefficient.

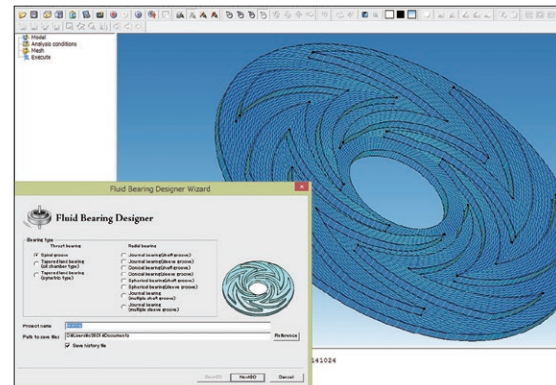

Functions (scFLOW, SC/Tetra)

			scFLOW	SC/Tetra
Preprocessor	Modeling	CAD data interface (import)	Parasolid, STEP, JT, STL, IGES, ACIS, CATIA V6, CATIA V5, CATIA V4, Creo Elements/Pro (Pro/Engineer), SOLIDWORKS, NX, Solid Edge, Inventor, DWG, DXF (3D-face), 3DM, VDAFS, IFC, Nastran, MDL	Parasolid, STEP, STL, IGES, ACIS, CATIA V5, CATIA V4, Creo Elements/Pro (Pro/Engineer), SOLIDWORKS, NX, Solid Edge, Inventor, DXF (3D-face), VDAFS, Abaqus, Nastran, Design Space, Plot3D, CGNS
		CAD data interface (export)	Parasolid, MDL	STL, Nastran, CGNS, Parasolid, MDL
		Primitives	Cuboid, cylinder, sphere, rectangle (panel)	Cuboid, cylinder, sphere, rectangle (panel)
	Mesh generation and faceter	Geometry modification	Data cleaning, editing solid, editing sheet, cross-section and extraction, coordinate conversion, wrapping	Data cleaning, editing solid, editing sheet, cross-section and extraction, coordinate conversion, turbomachinery (single-pitch extraction), wrapping
		Tetrahedron		●
		Pentahedron (prism, pyramid)		●
		Hexahedron		● (manual setting)
		Cuboid	● (when internal hexahedron elements are used)	● (when internal hexahedron elements are used)
		Polygon (polyhedron)	●	
		Sweep mesh	●	●
		Thin mesh	●	
		Voxel fitting mesher	●	
		Solid-based surface mesher	●	
	Conditions	Parasolid faceter	●	●
		Solid-based faceter	●	
		Easy set-up through wizard	●	●
		Unused dialogs hidden	●	●
		Collective settings to undefined regions	●	●
Solver	Mesh	Material property library (editable)	●	
		Laminated materials		● (laminated panel)
	Operation and control environment	VB Interface	●	●
		Selectable mouse operation modes	●	●
		Mapping	●	●
	Numerical scheme	Viewer mode	●	
		Unstructured mesh	●	●
		Overset mesh	●	●
		Mesh adaptation	●	●
		Mesh adaptation in solver	●	
		Discontinuous mesh interface	●	●
		ALE (rotation, translation, stretch)	●	●
		6-degree-of-freedom motion (6DOF)	●	●
		Mixing plane	●	●
		Finite volume method	●	●
	Flow types	Pressure correction	SIMPLEC, SIMPLE, PISO	SIMPLEC, SIMPLE, revised SIMPLEC
		Convection term accuracy	1st/2nd order (MUSCL/QUICK) upwind scheme, 2nd-order central difference (LES)	1st/2nd order (MUSCL/QUICK) upwind scheme, 2nd-order central difference (LES)
		Matrix	MILUGG-STAB, AMGCG-STAB, CGCCG-STAB	MILUGG-STAB, AMG, AMGCG-STAB, CGCCG-STAB
		Density based	● (defect correction method, JFNK method)	● (defect correction method)
		Hypersonic solver	●	
		Steady-state / transient calculation	●	●
		Incompressible fluid	●	●
		Compressible fluid	●	●
		Non-Newtonian fluid	●	●
		Buoyancy (Boussinesq approximation)	●	●
	Turbulence models	Multiple fluids	●	●
		Gas mixing	●	●
			Standard k-ε model, RNG k-ε model, MP k-ε model, AKN linear low-Reynolds number k-ε model, Realizable k-ε model, SST k-ω model, MPAKN linear low-Reynolds number k-ε model, Spalart-Allmaras one equation model, SA-comp model, LKE k-kL-ε model, SST-SAS model, LES, DES, DDES, IDDES	Standard k-ε model, RNG k-ε model, MP k-ε model, AKN linear low-Reynolds number k-ε model, GPC linear low-Reynolds number k-ε model, Non-linear low-Reynolds number k-ε model, Realizable k-ε model, SST k-ω model, MPAKN linear low-Reynolds number k-ε model, Spalart-Allmaras one equation model, LKE k-kL-ω model, SST-SAS model, LES, DES, VLES
	Thermal analysis	Heat conduction (fluid / solid)	●	●
		Convective heat transfer	●	●
		Heat radiation (view factor)	●	●
		Heat radiation (flux method)	●	●
		Heat conduction panel	●	●
		Moving heat conduction panel	●	
		Solar radiation	●	●
		Joule heat	●	●
		Mean radiation temperature calculation	●	●
		Graphic output of rays from lamp	●	
	Diffusion analysis	Diffusivity	●	●
		SORET effect	●	●
		Passive scalar	●	
	Index for ventilation efficiency / thermal comfort	PMV / SET*	●	●
		Humidity / dew condensation analysis	●	●
		Relative humidity / absolute humidity	●	●
	Reaction analysis	Dew condensation	●	●
		Chemical reaction	●	●
		Combustion reaction	● Eddy-dissipation model	● Eddy-dissipation model
	Particle analysis	Thermal CVD analysis	●	●
		Marker particles	●	●
		Mass particles	●	●
		Charged particles	● (user-defined function)	● (user-defined function)
		Spray model	●	●
		Liquid film	●	●
		Transforming dew condensation	●	●
	Discrete element method (DEM)	Transforming fluid / volume rate	● (VOF method)	● (VOF method)
		Contact model	Linear spring dashpot model, Hertz-Mindlin model, Walton-Braun model, EEPA model	
		Cloth model	●	
		String model	●	
		Cluster model	●	
		Cohesion model	●	
		Thermal	●	
		Ad/desorption (Humidity)	●	
		Dissolution	●	
		Melting	●	
	Multiphase flow analysis	Dynamic Domain	●	
		Free surface	● (VOF method, steady-state/transient, multiphase)	● (VOF method, transient)
		Solidification / melting analysis	●	●
		Boil / condensation	● (VOF method, Dispersed multiphase flow)	● (VOF method)
		Evaporation / condensation	●	●
		Cavitation model / erosion index	●	●
		Dispersed multiphase flow	●	●
	Aerodynamic noise analysis	Population balance model	●	●
		Wall boiling model	●	●
		Flowcs Williams & Hawkins' equation	●	●
		Weak compressible flow model	●	●
	Current analysis	Sound source detection model	●	●
		Output for Actran fan noise analysis function (Ring Dipoles method)	●	
	Battery model	Conductor current	●	●
		Conductor potential	●	●
	Thermo-regulation model	RC model	●	
		P2D model	● (1D model, 3D model)	
	Flow conditions	Semi-Empirical Thermal Runaway model	●	
		JOS, JOS-2	●	●
		Velocity	●	●
		Volume flow rate	●	●
		Mass flow rate	●	●
		Power law	●	
		Pressure (static pressure / total pressure)	●	●

Functions (scFLOW, SC/Tetra)

			scFLOW	SC/Tetra
Solver	Flow conditions (cont.)	Natural inflow / outflow	•	•
		Fan model	•	•
		Wave generation, wave dissipation	•	• (VOF method)
		Windkessel model	•	
	Thermal conditions	Fixed temperature	•	•
		Heat source	•	•
		Heat transfer coefficient	•	•
		Contact heat transfer coefficient	•	•
	Wall conditions	No-slip (stationary wall)	•	•
		Free-slip (symmetry wall)	•	•
		Log-law condition	•	•
		Low-Re-number adaptive wall function	•	•
		Surface roughness	•	•
	Pressure conditions	Wall model (LES)	•	•
		Fixed pressure	•	•
		Pressure loss	•	•
	Source conditions	Porous media	•	•
		Volume force / pressure loss	•	•
		Heat generation	•	•
		Smoke source (diffusing materials)	•	•
		Turbulence generation	•	•
		Solid shear heating	•	•
Postprocessor	User-defined conditions	Simplified propeller model	•	•
		Simplified rotor model	•	•
		Variables table / functions	•	•
		Script functions (JavaScript)	•	•
	Calculation control environment	User-defined function (compilation required)	•	•
		Job management	•	•
		Monitoring the calculation status	•	•
	Output for visualization	Email notification of the calculation	•	•
		VB interface	•	•
	Output post files	Wavelet transform	•	•
	Output for third party software		Software Cradle post files (FPH)	Software Cradle post files (FLD, IFLD)
			Abaqus, NASTRAN, ACTRAN, Femtet, Adams, Marc, Elements, LOGE, JMAG-Designer, EMSolution, FlowNoise, GT-SUITE, FieldView	Abaqus, Nastran, Femtet, ADVENTURECluster, JMAG-Designer, EMSolution, Optimus, Isight, modeFRONTIER, LMS Virtual.Lab, Actran, FlowNoise, GT-SUITE, KULI, Flowmaster, LOGE, EnSight, FieldView, AVS
Postprocessor	Drawing functions	Mesh, vector, contour plots	•	•
		Isosurface, streamline, pathlines, volume rendering	•	•
		Geometry display	• (STL file, NFB file, Wavefront OBJ file)	•
		2D graph	•	•
		Mirror / periodical copy	•	•
	Drawing position / orientation	Vortex center	•	•
		Arbitrary plane, surface, entire volume, cylinder	•	•
		Streamlines, isosurface	•	•
		Pathlines	•	•
		Arbitrary scaling	•	•
	Special effects	Arbitrary pick	• (scalar / vector values)	•
		Oil flow	• (on plane / surface)	•
		Texture mapping	• (on plane / surface, arbitrary geometry with texture)	•
		Lighting, luster, gradation	• (preset, arbitrary)	•
		Transparency, water-like expression, shadow	•	•
	Animation	Ray, Cloth model, Surface of particle, Road line, Heat transfer, IPC-2581	•	•
		Photorealistic	•	•
		Vector animation	•	•
		Flow line animation	•	•
		Cut-plane sweeping	•	•
	Analysis results	Marker particle	• (turbulent diffusion effect)	•
		Automatic translation of view point	• (view / focus points can be set)	•
		Key-frame animation, Time line	•	•
		Animation interpolated between cycles	•	•
		Variable registration	•	•
	Data image output	Integral (surface / volume)	• (scalar / vector integration)	•
		Comparison	• (clipping function, image compare)	•
		Projected area calculation	•	•
		Automatic search of the local max / min positions	•	•
		Import of CSV data	•	•
	Operation and control environment	Automatic change of colorbar	• (preset, arbitrary)	•
		Complex values data graphing	•	•
		Microsoft BMP, JPEG, PNG	• (size, resolution adjustable)	•
		CradleViewer	• (support steady-state / transient animation, attach to Office applications)	•
		AVI, WMV, MP4	•	•
		VRML, FBX, STL, glTF	•	•
		Copy & paste 3D onto Powerpoint	•	•
		Selectable help function	•	•
		OpenGL (Hardware acceleration, software rendering)	•	•
		VB interface	•	•
		Selectable mouse operation modes	•	•
		Stereoscopic view (side by side)	•	•
		Plug-in functionality	•	•
		Partial open field file by SSH	•	•
		3D-ROM File reading	•	•

System Configuration

Product	Compliant OS	CPU, Memory, HDD	Graphics	Approx. size of analysis for scFLOW	Compiler Environment (User defined function) for scFLOW	MPI Library
scFLOW SC/Tetra	Windows	Windows 10, Windows 11 (Verified by version 21H2, 22H2) Windows Server 2022	[Graphics] Graphics card that supports OpenGL for Preprocessor/Postprocessor	[Memory] Approx. 5 million elements/15.2GB	[Windows edition]¹⁾ Microsoft Visual Studio 2019 Microsoft Visual Studio 2022	[Windows edition] Intel® MPI Library 2021 Update 10 or 2018 Update 5 ⁴⁾
				[Maximum number of elements (actual)] 2210 million	[Linux edition] GCC (GNU Compiler Collection) (Linux standard)	[Linux edition] Intel® MPI Library 2021 Update 10 or 2019 Update 11 ⁴⁾
	Linux ²⁾	RedHat Enterprise Linux 8 (Verified by 8.8) RedHat Enterprise Linux 9 (Verified by 9.2) SUSE Linux Enterprise Server 15 (Verified by SP4 and SP5)		[Maximum degree of parallelism (actual)] 36864	[Linux ARM edition] GCC (GNU Compiler Collection) (Linux standard)	[Linux ARM edition] OpenMPI 4.1.5

Windows is a registered trademark of Microsoft Corporation in the United States and other countries.

The official name of Windows is the "Microsoft® Windows® Operating System".

Microsoft Visual Studio is a registered trademark of Microsoft Corporation in the United States and other countries.

Linux is a trademark registered to Linus Torvalds in the United States and other countries.

Red Hat is a registered trademark of Red Hat, Inc. in the United States and other countries.

SUSE is a registered trademark of SUSE LLC.

All other product and service names mentioned are registered trademarks or trademarks of their respective companies.

¹⁾ Only compliant with Solver, Monitor, and Meshing function of Preprocessor.

²⁾ Only scFLOW Solver and Meshing function of Preprocessor for Linux are supported. Certified CPU : Fujitsu A64FX, Ampere Altra, AWS Graviton3, Certified OS: RedHat Enterprise Linux 8.9. Please contact support when installing on machines equipped with Fujitsu A64FX

³⁾ Verified with Windows SDK (10.0.22621.0).

⁴⁾ Use Intel-MPI packaged in Cradle products. This version is bundled with Intel MPI 2021 Update 10 and Intel MPI 2018 Update 5(Windows), Intel MPI 2019 Update 10(Linux). We recommend you use Intel MPI 2021 Update 10. When activating on multiple machines, we recommend you use it under the environment that meets the Intel® MPI Library system requirements available at <https://software.intel.com/en-us/articles/intel-mpi-library-release-notes> (or successor URL).

What is CAE?

scSTREAM | HeatDesigner

scFLOW | SC/Tetra

scOST

Co-simulation with MSC Products

PICLS

Analysis Procedure

Main Mutual Features

Optimization Tool

License Type

Third-party Software